





USGI Ranger Plate™

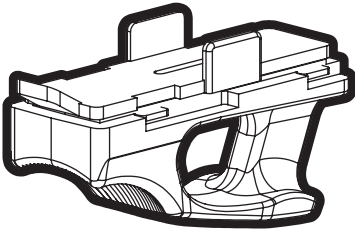


- ⚠️ **WARNING:** BEFORE STARTING, MAKE SURE THE WEAPON IS UNLOADED, THE CHAMBER IS EMPTY, AND THE SAFETY ENGAGED.
- ⚠️ **CAUTION:** PLEASE READ ALL INSTRUCTIONS BEFORE PROCEEDING. COMPONENTS UNDER SPRING PRESSURE MAY EJECT FORCEFULLY AND COULD CAUSE INJURY.
- ⚠️ **WARNING:** OBSERVE SAFE FIREARM HANDLING PRACTICES AT ALL TIMES. FAILURE TO DO SO MAY RESULT IN SERIOUS BODILY INJURY OR DEATH. MAGPUL INDUSTRIES SHALL NOT BE RESPONSIBLE FOR INJURY, DEATH OR PROPERTY DAMAGE RESULTING FROM FAULTY INSTALLATION, MISUSE, ILLEGAL USE, OR MODIFICATION OF THIS PRODUCT.

USGI RANGER PLATE™ INSTALLATION




CAUTION: SPRING UNDER PRESSURE

Use care when performing installation as the magazine spring may eject and cause injury.




STEP 1: REMOVE EXISTING FLOOR PLATE

Using a 5.56x45 *Dummy Round* or *small screwdriver*, gently pry the *floor plate* up to disengage the catch while sliding the *floor plate* towards the rear of the magazine.




STEP 2: INSTALL LOCK PLATE

Install the included *Lock Plate* by setting it on top of the magazine spring with the bullet symbol facing the front of the magazine. Push the *Lock Plate* down, hold, and continue to the next step.



STEP 3: ATTACH RANGER PLATE

While depressing the *Lock Plate*, slide the *Ranger Plate's* exposed metal tabs underneath the magazine body's tabs. Once slid fully forward into place you should hear a click, indicating the *Lock Plate* is seated correctly.



STEP 4: VERIFY INSTALLATION

Make sure the *Lock Plate* is correctly seated. Perform final inspection including function check per US ARMY TM 05588C-10/1A(41-42) to verify correct installation.

NOTE: For best results it is not recommended to load a 30-round USGI magazine with more than 28 5.56x45 cartridges (.223 Remington) to ensure correct seating.

Attention: Check magazine function via live fire test prior to tactical deployment.