





# SSG

## Selector Set

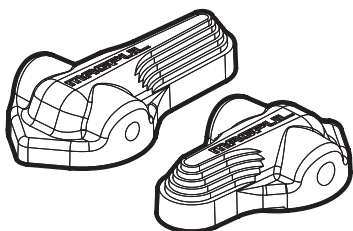

- ⚠ WARNING: BEFORE STARTING, MAKE SURE THE WEAPON IS UNLOADED, THE CHAMBER IS EMPTY, AND THE SAFETY ENGAGED.**
- ⚠ CAUTION: PLEASE READ ALL INSTRUCTIONS BEFORE PROCEEDING. COMPONENTS UNDER SPRING PRESSURE MAY EJECT FORCEFULLY AND COULD CAUSE INJURY.**
- ⚠ WARNING: OBSERVE SAFE FIREARM HANDLING PRACTICES AT ALL TIMES. FAILURE TO DO SO MAY RESULT IN SERIOUS BODILY INJURY OR DEATH. MAGPUL INDUSTRIES SHALL NOT BE RESPONSIBLE FOR INJURY, DEATH OR PROPERTY DAMAGE RESULTING FROM FAULTY INSTALLATION, MISUSE, ILLEGAL USE, OR MODIFICATION OF THIS PRODUCT.**


## SSG SELECTOR INSTRUCTIONS



### STEP 1: REMOVE OEM SELECTOR

Using a *flathead jeweler's screwdriver*, extract the *M3 x 12mm screw*. The selector can now be removed.

Repeat on reverse side.



### STEP 2: INSTALL SSG SELECTOR SET

Place the *Magpul SSG Selector*, text right side up, on the selector cam. Reinstall and hand tighten the *12mm screw* using a *flathead jeweler's screwdriver*. Use care not to overtighten. Overtightening may cause damage to the SSG Selector.

Repeat on reverse side.