




M-LOK™ TRIPOD ADAPTER

For Manfrotto® products using RC2 rapid connect adapter

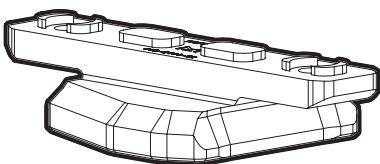


- ⚠ **WARNING:** BEFORE STARTING, MAKE SURE THE WEAPON IS UNLOADED, THE CHAMBER IS EMPTY, AND THE SAFETY ENGAGED.
- ⚠ **CAUTION:** PLEASE READ ALL INSTRUCTIONS BEFORE PROCEEDING. COMPONENTS UNDER SPRING PRESSURE MAY EJECT FORCEFULLY AND COULD CAUSE INJURY.
- ⚠ **WARNING:** OBSERVE SAFE FIREARM HANDLING PRACTICES AT ALL TIMES. FAILURE TO DO SO MAY RESULT IN SERIOUS BODILY INJURY OR DEATH. MAGPUL INDUSTRIES SHALL NOT BE RESPONSIBLE FOR INJURY, DEATH OR PROPERTY DAMAGE RESULTING FROM FAULTY INSTALLATION, MISUSE, ILLEGAL USE, OR MODIFICATION OF THIS PRODUCT.

INSTALLATION INSTRUCTIONS

The *M-LOK Tripod Adapter* is compatible with Manfrotto products equipped with RC2 attachment. Fitment is not guaranteed with any other product.


STEP 1: Install T-Nuts and Screws to the M-LOK Tripod Adapter

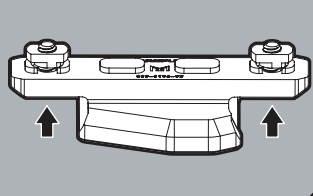

Insert the Screws through the *M-LOK Tripod Adapter* and thread the *T-Nuts* with the "stem" of the nut facing towards the mount. Initial installation may be stiff due to the nylon thread patch on the *Screws*.

NOTE: Pre-fit *M-LOK Adapter Plate* to the desired tripod head to ensure proper orientation prior to installation onto the hand guard or forend.


STEP 2: Install the M-LOK Tripod Adapter to the hand guard or forend

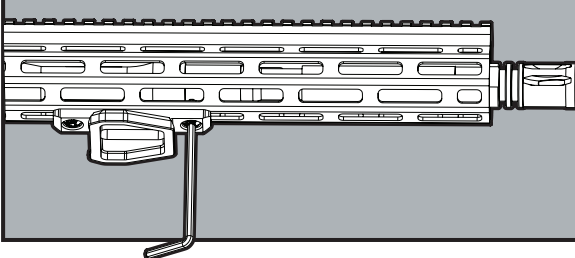

Align the mount using the *M-LOK* lugs on the desired install location and secure the *M-LOK Screws* using a 1/8" hex wrench. See enclosed *M-LOK* accessory instruction sheet for detailed *M-LOK* instructions. (072-0087)


NOTE: The *M-LOK Tripod Adapter* is intended for use on metal forends or hand guards and is to be installed near the center of gravity (balance point) of the weapon. Installing it forward of that location may put undue stress on the firearm when supported only by the tripod head and potentially affect the accuracy of your rifle.

STEP 3: Mount the rifle with the M-LOK Tripod Adapter on the Manfrotto head

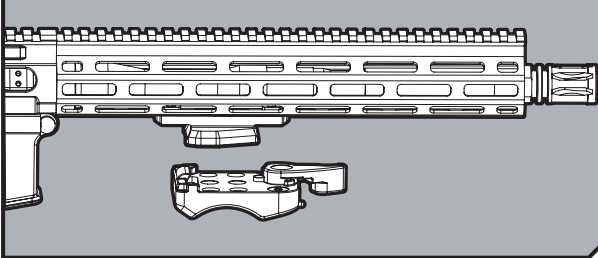

Ensuring that the locking lever on the tripod head top cast plate is set to the "unlock" position, set the rear of the *M-LOK Tripod Adapter* on the rear channels of the top cast plate. Allow the rifle to rock forward and depress the release on the locking lever in order to lock the weapon system onto the tripod head. Twist the rifle side to side slightly to ensure the plate is locked in place.

STEP 4: Verify Installation

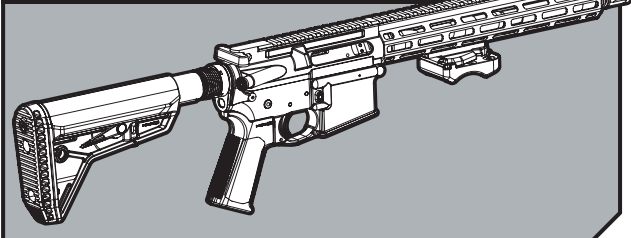

Perform final inspection including function check per **US Army TM 9-1005-23&P Unit and Direct Support Maintenance Manual (3-97)** to verify proper weapon function.

Always test fire your weapon before using it in an operational environment.