


X4 Low-Profile Remote™



Installation and User Guide

1. Before installing the X4 Low-Profile Remote™, first determine its mounting location in your configuration and ensure the cable will reach your X4 device
2. Using the provided alcohol wipe, clean the back of the X4 Low-Profile Remote and its associated mounting surface on your configuration.
3. Remove the adhesive backing and firmly adhere each hook-and-loop strip onto your X4 Low-Profile Remote and its intended mounting surface:
4. Plug-in the I/O Connector to the I/O Accessory Port on your X4 Device:


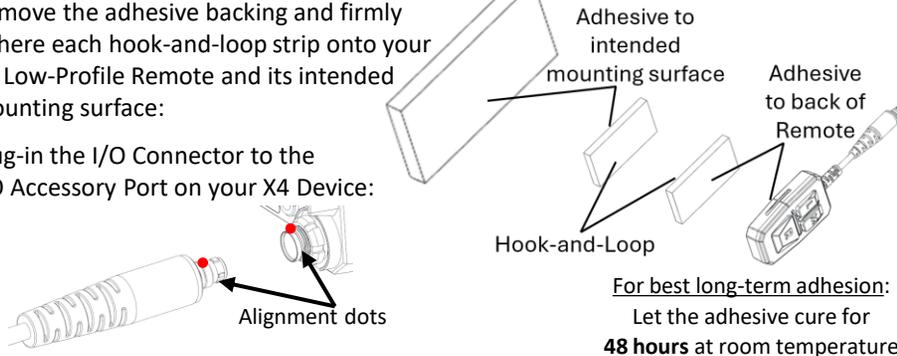


For best long-term adhesion:
Let the adhesive cure for
48 hours at room temperature





MAZTECH INDUSTRIES

Performs X4-FCS™ function:

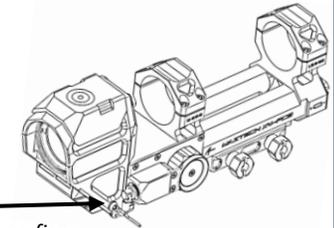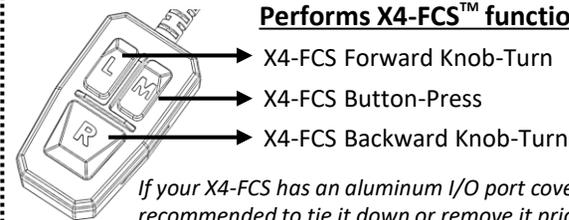

Performs X4-LRF™ function:

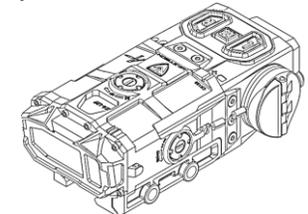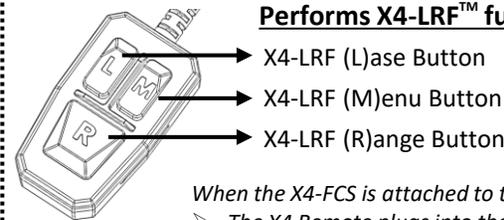

When the X4-FCS is attached to the X4-LRF with the X4 FCS-to-LRF Cable:
➤ The X4 Remote plugs into the X4-FCS and controls the X4-LRF



MaztechIndustries.com

Maztech Industries, LLC offers its products with specific terms, conditions, notices and license agreements. The terms and conditions apply to all sales and uses. Please review carefully at www.MaztechIndustries.com. These terms and conditions include limited warranties and disclaimers of liabilities. Keeping, using or allowing use of Maztech Industries, LLC's products indicates your agreement to these terms.

FCC Compliance: This device has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures: (a) Reorient or relocate the receiving antenna, (b) increase the separation between the equipment and receiver, (c) connect the equipment into an outlet on a circuit different from that to which the receiver is connected, (d) consult the dealer or an experienced radio/TV technician for help.